




**Specifications:**

Axial Sensitivity (20±5°C)	~ 25 mV/kN
Measurement Range	0 ~ 200 kN
Non linearity	≤ 1% F.S.
Power Supply Voltage (Constant Current Source)	+24~+28 VDC
Operating Current	2~10mA (Typical 4mA)
Bias Voltage	9~12VDC
Mounting Resonance Frequency	> 30 kHz
Operation Temp. Range	-40~+120 °C
Mounting Method	Φ26.5 through hole
Sensing Element	Quartz
Case Material	High-Strength Stainless Steel
Weight	140 g
Output Type	L5 (side)
Grounding	Signal Ground Connected to Case
Low Noise Cable to BNC	Included
Calibration Certificate	Included

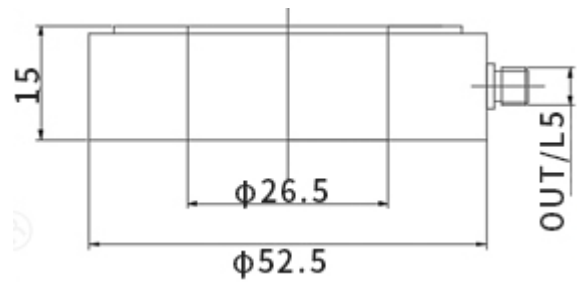

Schematic diagram